





QUICK OPERATION GUIDE

Castle Automatic Feeder



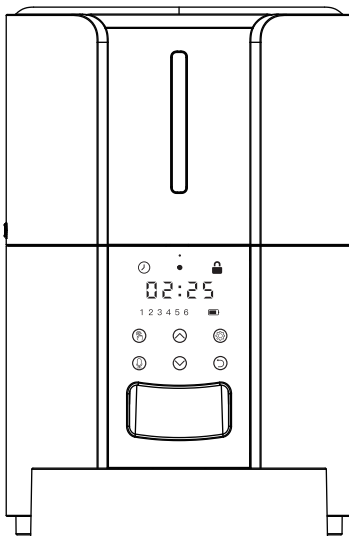



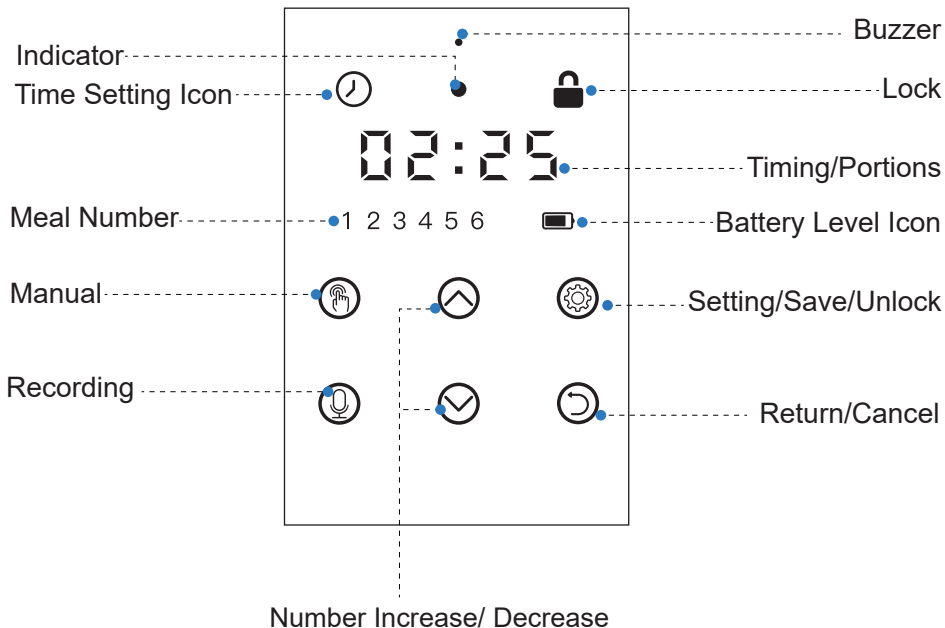

Model: FT70 & FT70 Plus

DISPLAY OVERVIEW:








BUTTONS OVERVIEW:

NOTE: Will lock automatically after 2 min of inactivity. Hold  for 2s to unlock.

Button	Description	Operable Mode Function
	Set /Save Unlock button	<ul style="list-style-type: none">• Press to save and move to the next step.• Press and hold for 2s to lock/unlock other buttons and screen.
	Return / Cancel button	<ul style="list-style-type: none">• Return to the previous step.• Return to interface after setting up.
	Number Increase button	<ul style="list-style-type: none">• Press to increase the value.
	Number Decrease button	<ul style="list-style-type: none">• Press to decrease the value.
	Manual button	<ul style="list-style-type: none">• [Must be Unlocked] Press to feed 1 portion.
	Recording button	<ul style="list-style-type: none">• [Must be Unlocked] Hold for 3s and start recording after a beep is heard {max 10s}.• Recoding saved after a double beep is heard.

SCREEN PANEL INTRODUCTION:

ICON	Function of ICON
 Lock	<ul style="list-style-type: none"> • Locks automatically after 2 min of inactivity. • Hold  button for 2 seconds to unlock.
 Clock indicator	<p>Flash Indicates:</p> <ul style="list-style-type: none"> • Powered by adapter or battery. <p>Note: when flashing, press  button to set up/ modify the current time.</p>
02:25 Timing 【24-hours format】	<ul style="list-style-type: none"> • Local time.
1 2 3 4 5 6 Meal	<ul style="list-style-type: none"> • Number of meals.
 Battery Level	<ul style="list-style-type: none"> • Lights up when running on battery power. Turns red to indicate low battery.

INSTRUCTION MANUAL:

STEP 1 — Setting Current Time

Note: Clock icon flashes when powered as shown in fig.(01).

[If Screen is Locked]

Press  and hold for 2s to unlock screen as shown in fig.(02).



fig.(01)




fig.(02)

TIP: Please note the conversion between 24-hour format and 12-hour format.




Example: 9:00AM = 9:00; 10:00PM = 22:00 More as below:


12-hour Clock ↔ 24-hour Clock Comparison Chart

00:00 (Midnight)	00:00 (Beginning of the day)		
		01:00PM	13:00
01:00AM	01:00	02:00PM	14:00
02:00AM	02:00	03:00PM	15:00
03:00AM	03:00	04:00PM	16:00
04:00AM	04:00	05:00PM	17:00
05:00AM	05:00	06:00PM	18:00
06:00AM	06:00	07:00PM	19:00
07:00AM	07:00	08:00PM	20:00
08:00AM	08:00	09:00PM	21:00
09:00AM	09:00	10:00PM	22:00
10:00AM	10:00	11:00PM	23:00
11:00AM	11:00	12:00PM (Midnight)	24:00 (End of the day)
12:00AM (noon)	12:00		

STEP 1.1— HOUR SETTING





[Must be Unlocked]

Press  to set the “hour” of the time.
The two hour digits flash, press / to set the “hour”.



STEP 1.2— MINUTE SETTING

[Must be Unlocked]

After setting hour, press  to move to set the “minute” of the time. press / to set the “minute”. Press  to save.


Note:


Press  to modify if needed.








STEP 2 —Setting Meal


STEP 2.1

Press  then "1" flashes to set up the first meal.






STEP 2.2

Press  to set the "hour" of the time. Press / to set the "hour". Press  to move to set the "minute" of the time. Press  to save.




STEP 2.3


Press / to set up portion then press  button to save.

Note:

Press  to modify if needed.




STEP 2.4

Press  to move to set other meals.
Repeat above step to set up meal time and portion.



STEP 3 —Return to Interface

STEP 3.1

Press  to return to interface when setting up as shown in fig.(01).
(Numbers NOT displayed when portion set to 0 as shown in fig.(02)).




fig.(01)






fig.(02)



STEP 3.2

Press  to modify local time, feeding time and portion if needed.




STEP 4 — Locking & Unlocking


Lock:


Press  to return to interface when setting up, press  for 2s to lock the screen, the lock icon will display.

(**Note:** Locks automatically after 2 min of inactivity).




Unlock:


Press and hold  for 2s to unlock the screen, the lock icon will disappear.



STEP 5 —Recording


[Must be Unlocked]


Hold  for 3s and start recording after a beep is heard (max 10s).
Double beep indicates recording is saved.



STEP 6 —Manual Feed



[Must be Unlocked]

Press  to feed 1 portion.



STEP 7 —Reset to Factory Default

[Must be Unlocked]

Press and hold  and  at the same time for 3s until a beep is heard.

